

ADDENDUM #2

DATE: **April 11, 2018**

TO BIDDING DOCUMENTS ENTITLED:

**Columbia Public Schools
New SW Middle School Site Package**

PWA PROJECT NUMBER: 201621.01

BID DATE: **2:00p.m. Tuesday, April 17, 2018**

PREPARED FOR: **Columbia Public Schools**

CONSULTANT: **PWArchitects, Inc.
Attn: Chris Davis, AIA
Email: cdavis@PWArchitects.com**

Drawings and Specifications for the above noted project and the work covered thereby are herein modified as follows, and except as set forth herein, otherwise remain unchanged and in full force and effect:

General:

1. **Plan holders List:** A plan holders list is available online at www.adsmo.net or by calling ADS at (573) 446-7768.
2. **See attached letter from Engineering Surveys and Services.**
3. **The asphalt shall be installed per the spec with application of prime and tack.**

Specifications:

1. None.

Drawings:

1. None.

Attachments:

1. Letter from Engineering Surveys and Services

END OF ADDENDUM

Engineering Surveys & Services

Consulting Engineers, Land Surveyors, and Geoprofessionals
Analytical and Materials Laboratories

1113 Fay Street
Columbia, Missouri 65201
Telephone: 573-449-2646

ess@ess-inc.com
www.ess-inc.com

ADDENDUM NO. 2


DATE: April 12, 2018

TO CONTRACT DOCUMENTS FOR: Columbia Public Schools
New SW Middle School Site Package
Columbia, Missouri
CPS RFP #18/60

BID DATE: 2:00 pm, Tuesday, April 17, 2018

PREPARED FOR: Columbia Public Schools


CONSULTANT: *Engineering Surveys & Services*
1113 Fay St.
Columbia, MO 65201
Attn: Zachary Thomas

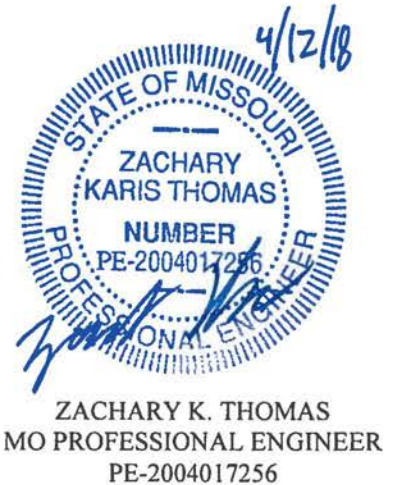

This Addendum forms a part of the Contract documents. It supplements and modifies the documents as follows:

ITEM NO. 1 GENERAL

- A. The site contractor shall provide permanent grass establishment for all disturbed areas via hydroseed application per specification Section 39 92 00. This includes all onsite areas and all offsite areas as indicated in the three plan sets included in the bid documents. The only excluded areas are the areas to receive grass sod, as indicated on the Landscape Plan sheets. Site contractor shall provide maintenance of all hydroseeded areas until satisfactory turf is achieved as defined in specification Section 39 92 00.
- B. Alternate #4 shall include all the construction access drive and laydown areas as indicated on sheet C10.02.
- C. Insurance costs if required by Magellan Pipeline shall not to be included in the bid amount.
- D. If necessary, all excess suitable fill remaining after all excavation operations have been completed shall be placed in layers and compacted onsite in the graded area north of the north entrance per the compaction requirements of the project geotechnical report. All excess fill shall be placed to provide positive drainage at a minimum 2% slope and shall not prevent full drainage of surrounding areas. Excess fill placement location and slopes shall be approved by Owner prior to placement.
- E. Attached is the detail for the sidewalk connection at the dock wall prepared by Crockett Engineering Consultants that was indicated in Addendum No. 1 Item No. 2 H.

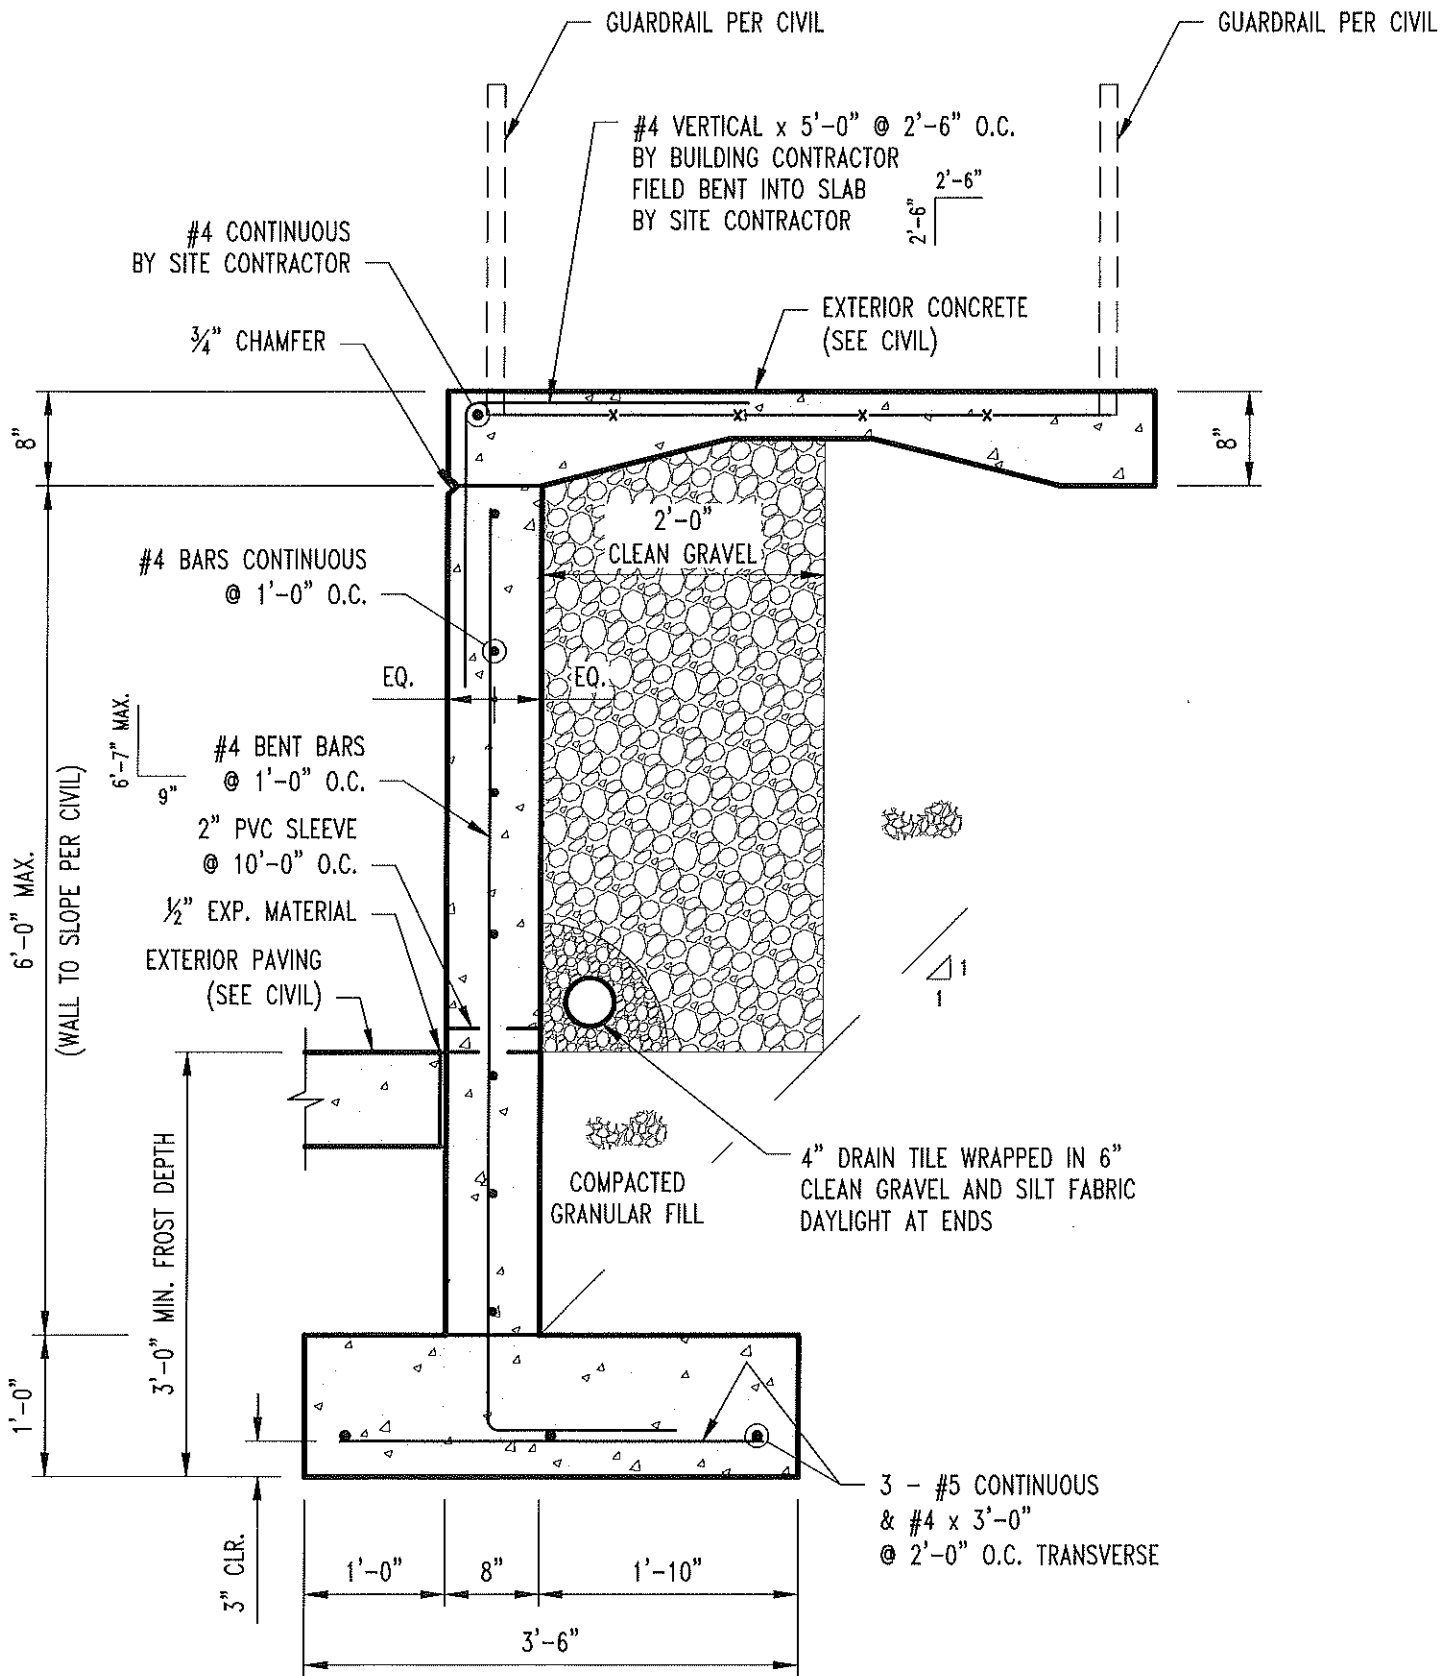

F40
S201

RETAINING WALL SECTION